


COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

UMBERTA

LARGE ROUND



Round bulkhead lamp with **no visible screws**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **2xE27** version available. Provided as option with motion sensor or emergency kit. Insulation class II, Protection rating IP66.



*Plafoniera circolare **senza viti a vista**, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **LED GX53 con Kelvin impostabile** o **2xE27**. Fornita anche con sensore o kit d'emergenza. Classe di isolamento II, grado di protezione IP66.*



1B3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE		WALL	CEILING	



UMBERTA - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free.

COVER in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione.


Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE complete with highly heat resistant **REFLECTIVE PLATE**, suitable for the electrical devices fixation. Provided with GX53 or E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE completa di **PIATTO RIFLETTENTE** ad alta resistenza al calore, adatto ad alloggiare gli accessori elettrici. Fornita completa di portalamпада GX53 o E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

UMBERTA



Dimensions and weight

Diameter: Ø 350 mm
Depth: 94 mm
Weight: 1,3 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:


Opal

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

EMERGENCY VERSION



Detailed information on page 217

1B3.000.EM1

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available. Quick and easy lamp replacement for a very simple maintenance after installation. Daylight and motion sensor available as option.

		100 - 240 V			*ADD. SUFFIX
	7 W	800 Lm	6500 K	.A1K	
			4000 K		
			2700 K		
	11 W	1300 Lm	6500 K	.B1K	
			4000 K		
			2700 K		
	18 W	2000 Lm	6500 K	.E1K	
			4000 K		
			2700 K		
	7 W + SENSOR	800 Lm	6500 K	.ASK	
			4000 K		
			2700 K		
	11 W + SENSOR	1300 Lm	6500 K	.BSK	
			4000 K		
			2700 K		
	18 W + SENSOR	2000 Lm	6500 K	.ESK	
			4000 K		
			2700 K		

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with single or double **E27 lampholder**. Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)		.E27
2x E27 (CFL -LED)		.E28
E27 + SENSOR (CFL -LED)		.ES7
2x E27 + SENSOR (CFL -LED)		.ES8


7W 11W 18W = 60W 100W 150W incandescent

SAVE 90%

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

UMBERTA
LARGE ROUND



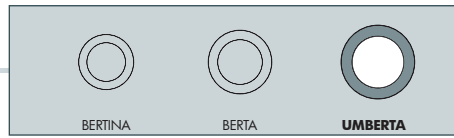

UMBERTA GX53	
7W	1B3.000.A1K
11W	1B3.000.B1K
18W	1B3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 12
Kg 22
mc 0,198

UMBERTA E27	
1xE27 lampholder	1B3.000.E27
2xE27 lampholder	1B3.000.E28
1xE27 with sensor	1B3.000.ES7
2xE27 with sensor	1B3.000.ES8

Pcs 12
Kg 19,6
mc 0,198